



02

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 3/00		(11) International Publication Number: WO 98/41037
A1		(43) International Publication Date: 17 September 1998 (17.09.98)
(21) International Application Number: PCT/FI98/00115 (22) International Filing Date: 10 February 1998 (10.02.98) (30) Priority Data: 970890 28 February 1997 (28.02.97) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): LALLUKKA, Toivo [FI/FI]; Ketarakuja 3 D 24, FIN-90650 Oulu (FI). RUKAJÄRVI, Arto [FI/FI]; Pikku-öömintie 8, FIN-90460 Oulunsalo (FI). (74) Agent: PAPULA REIN LAHTELA OY; Fredrikinkatu 61 A, P.O. Box 981, FIN-00101 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: PROCEDURE FOR ENSURING THE ACTIVATION OF A V5 INTERFACE

(57) Abstract

The present invention relates to a procedure for ensuring the activation of a V5 interface formed between a local exchange and an access node. According to the invention, the checking of the operational condition of the primary and secondary links is started simultaneously both on the local exchange side and on the access node side, and if a confirmation indicating that the link is operational is received for the secondary link first, then a switchover of the primary link to the secondary link according to the V5 definitions is performed and the new primary link is used for protection in the V5 interface during the V5 interface activation process. The invention makes it possible to avoid unnecessary interruptions of activation during the V5 interface activation procedure.

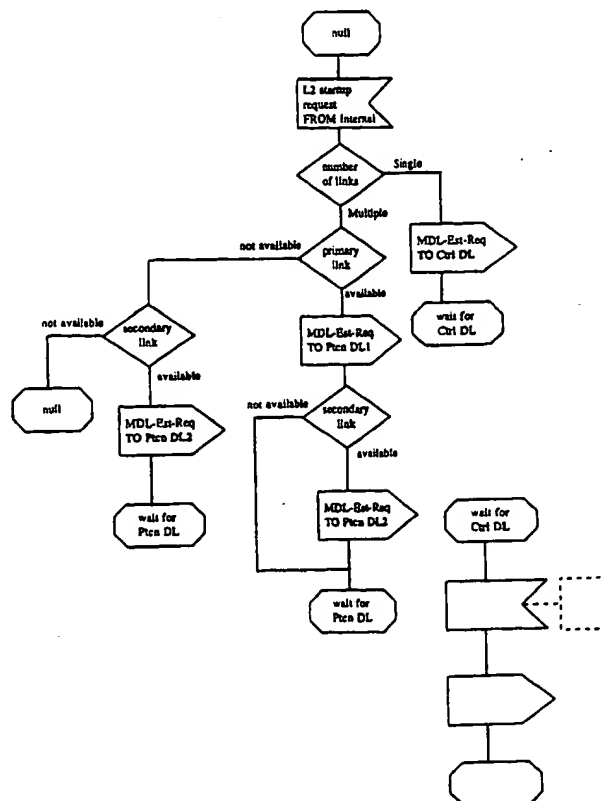

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PROCEDURE FOR ENSURING THE ACTIVATION OF A V5
INTERFACE

The present invention relates to a procedure as defined in the preamble of claim 1 for ensuring the
5 activation of a V5 interface formed between a local exchange and an access node.

Open interfaces (V5.1 and V5.2) between a local exchange and a local network or an access node are defined in the ETSI (European Telecommunications and
10 Standards Institute) standards of the ETS 300 324 and ETS 300 347 series. V5 interfaces enable subscribers belonging to a physically separate local network to be connected to a telephone exchange using a standard interface. In the present application, V5 interface specifically means a dynamic concentrator interface
15 (V5.2) as defined by the standard series ETS 300 347, which consists of one or more (1 - 16) PCM (Pulse Code Modulation) lines. One PCM line comprises 32 channels or time slots, each of which with a transfer rate of
20 64 kbit/s, i.e. 2048 kbit/s in all. The V5.2 interface supports analogue telephones as used in the public telephone network, digital, such as ISDN (Integrated Services Digital Network) basic and system subscriber connections as well as other analogue or digital terminal
25 equipment based on semi-fixed connections.

Certain time slots in the V5 interface, which form a channel called C-channel, serve to transmit the protocols used for controlling the interface itself and the calls transmitted over the interface. A C-channel is a 64 kbit/s time slot reserved for this
30 purpose, and it serves to transmit information which may belong e.g. to the Control protocol, Link control protocol, Protection protocol or BCC protocol of the V5 interface, or which may consist of PSTN signalling or ISDN data. Further, according to the standards mentioned above, a C-channel can be reserved for time
35

slots 16, 15 and/or 31 in the PCM line or V5 interface link. Especially in a V5 interface, the system automatically creates C-channels for the critical protocols (Control, Link control, BCC and Protection), whereas
5 the operator can place the PSTN signalling as desired, either in the same channel as the critical protocols or in another C-channel. In addition, the operator may allocate a maximum of three signalling channels as so-called backup channels. These channels are resorted to
10 in the case of a failure of the link to which the channels were originally allocated. In a V5 interface having more than one 2 Mbit/s links, a link whose physical C-channel in time slot 16 transmits the Control, Link control, BCC and Protection protocols is defined
15 as the primary link. Further, a link whose physical C-channel in time slot 16 only transmits the Protection protocol is a secondary link.

In conjunction with the activation of a V5 interface, certain standard operations are performed
20 to make sure that the LAPV5 protocol in both the access node and in the local exchange can ensure reliable transparent data transfer in the C-channel. The function of the LAPV5 protocol is to monitor the operation of the signalling channels, multiplex layer-3
25 signalling into the PCM frame structure and transmit ISDN data in an appropriate manner. In the V5 interface currently used, the system start-up procedure first checks the operation of the primary and secondary links. After this, the Protection protocol data link
30 is activated, first for the primary link and then for the secondary link. However, the system does not take into account the conflicting situation that may arise when the local exchange and the access node receive different responses to the checking of the primary and
35 secondary links, i.e. when one receives a "link ok" message and the other a "link failed" message. Such a situation may occur when e.g. the local exchange takes

the primary link out of use (blocking) and a switchover of the primary link to the secondary link is performed. Further, the access node may for some reason be later reset, so the interface must be reactivated at the access node end. However, the reset caused the loss of the primary link blocking data previously obtained, so the access node will try to activate the interface as normal, assuming the primary link to be available. In this situation, the access node will not receive a confirmation about the primary link and remains in a locked state while waiting for a confirmation. On the other hand, a conflict may arise when the V5 interface recovers from a situation in which both the primary and secondary links are broken. In this situation, one of the parties may start signalling via the primary link while the other party starts signalling via the secondary link, depending on which one of the links becomes ready for operation first. Further, during the normal process for activating the V5 interface, a L2ACT procedure consistent with the above-mentioned standard starts the procedure for activating the Protection protocol data link in the normal manner and waits in a predetermined state for a confirmation regarding the primary link. The other party again may detect that the primary link is out of order and try to establish a Protection protocol channel directly in the secondary link. The data link activation procedure remains waiting for a confirmation for the use of the secondary link in another predetermined state. The result is a locked situation where neither party can get a confirmation and the V5 interface cannot be activated.

The last stage in the V5 interface layer 2 activation process is the activation of a PSTN data link. If the PSTN protocol has been configured to use e.g. the C-channel in time slot 15 of the primary link and the primary link is not operational during the se-

quence, the result is again a locked situation. If the link to which the PSTN data had been configured is out of order, then L2ACT will receive a "release link" message and the activation procedure is halted.

5 The object of the present invention is to eliminate the problems described above. A specific object of the present invention is to disclose a procedure that makes it possible to avoid the locked situations described above.

10 A further object of the present invention is to disclose a procedure for ensuring successful activation of a V5 interface in certain failure situations in which the failure does not necessarily require an interruption of the activation of the V5 interface.

15 As for the features characteristic of the invention, reference is made to the claims.

 In the procedure of the invention for ensuring the activation of a V5 interface, preferably a V5.2 interface, formed between a local exchange and an
20 access node and comprising at least two links formed via a PCM line, the operational condition of the links reserved for protocols essential to the operation of the interface as well as the operational condition of the primary and secondary links reserved for protocols
25 used to back them up is checked during the process for activating the interface. To do this in practise, a certain programme block or equivalent on the local exchange side and on the access node side checks the operational condition of the link from its own side;
30 in other words, in the access node a check is carried out to establish whether the connection from the access node to the link is in order, while in the local exchange a corresponding check is carried out. Once it has been ascertained that the link reserved or allocated
35 for the protocol is operational, the protocol can be activated in accordance with a predetermined composition (V5 interface Provision).

According to the invention, the verification of the operational condition of the primary and secondary links is started simultaneously both on the local exchange side and on the access node side. After this, both the local exchange and the access node wait for a confirmation from the other party that the primary and/or secondary links/link are/is operational. If the first confirmation received indicates that the secondary link is operational, then in this case a switchover of the primary link to the secondary link is performed according to the above-mentioned V5 definitions and the new primary link is used for protection in the V5 interface during the V5 interface start-up process.

As compared with prior art, the present invention has the advantage that it makes it possible to avoid the locked situations during the V5 interface start-up process that may occur according to current definitions. Moreover, the present invention makes it possible to ensure that the V5 interface start-up process will continue even if one of the links in the V5 interface should be out of order or fail during the process. A further advantage of the invention worth mentioning is that, in a V5 interface operated in accordance with the invention, there is a provision for the possibility that something goes wrong during the start-up process.

In an embodiment of the present invention, if the switchover to the secondary link is unsuccessful, the activation process is halted in accordance with the V5 definitions. On the other hand, if the switchover is successful and the primary link is activated at a later stage of the process or during the switchover, then the primary link is configured as a new secondary link. According to the above-mentioned standards, the primary link obtained via the process described above can be used at a later stage of the activation process to back up the C-channel/channels so that a failure of

the link in one of the channels will not result in an interruption of the activation process and a return to the initial state.

Next, the setup of a data link for the PSTN
5 protocol is described as an example. The data links for other protocols essential to the operation of the V5 interface, such as the Control, Link control and BCC protocols, are set up and/or their setup is ensured in a corresponding manner during the activation of
10 the V5 interface. Further, preferably before the request for the activation of a data link for a protocol is transmitted, the link allocated for the data link in question is checked to determine whether it is operational. If the link for the PSTN protocol is not
15 operational, then a switchover of the link reserved for the PSTN protocol is carried out by running the Protection protocol over the primary link and the PSTN protocol is only activated after the switchover. Further, in a preferred embodiment of the invention, even
20 if the link carrying the PSTN protocol is operational, switchover of the link allocated for the PSTN protocol can be carried out using the Protection protocol if confirmation of the activation of the protocol is delayed.

25 In a preferred embodiment of the invention, when a "release link" command concerning the data link for the Protection protocol or some other protocol is received, the data link is immediately reactivated. In current solutions, the process returns to the initial
30 state, which significantly retards the operation of the interface as it interrupts the activation process to no purpose, because in any case a corresponding data link activation procedure is carried out when the process is restarted from the initial state.

35 In the following, the invention will be described by the aid of embodiment examples by referring to the attached drawing, in which Figures 1a-1g

present flow diagrams representing a preferred embodiment of the procedure of the invention.

As regards the figures, the following should be noted. The transmission and reception of messages as presented in the figures are applicable both at the local exchange end and at the access node end of a V5.2 interface. Further, the shapes of the boxes in the diagrams have certain meanings; an octagon means that the process is in a given state, e.g. waiting for the confirmation of a request made in the process, a pentagon with an inward-pointing angle on the right-hand edge means that a message is received, a pentagon with an outward-pointing angle resembling an arrow on the right-hand edge means that a message is transmitted, and a rhombus signifies that an inference or other function is performed.

Starting from Fig. 1a, a request to start up the V5 interface is received. First, the number of links comprised in the interface is determined, and if there is only one link, then a data link setup request for the Control protocol data link is transmitted, whereupon the process continues as defined in the standards referred to above. If there are multiple links, first the availability of the primary link is checked and, regardless of whether that link is available or not, the process immediately continues by checking the availability of the secondary link. When a confirmation of the availability of the link is received, then a data link setup request for the Protection protocol is transmitted over both the primary and secondary links. After this, the process remains waiting until the Protection data link is set up. Referring to Fig. 1b, action continues from the octagon where the process is waiting for a confirmation of establishment of the Protection data link, and when a confirmation is received from data link 1 (message "from Ptcn DL1" shown in broken lines in Fig. 1b), the

process then continues in the normal manner as defined in the above-mentioned standards. However, if a confirmation regarding the Protection data link is first received from data link 2 (secondary), then immediately a request for switchover of data link 1 (primary) is transmitted, whereupon an attempt is made to switch over the primary link to the secondary link. Fig. 1c illustrates the switchover carried out in conjunction with start-up. If a switchover confirmation message ("switchover complete") is received, then the process continues normally according to the above-described procedures, see Fig. 1c left-hand section. Further, a message indicating that the primary link, too, is operational may be received during the switchover procedure. In this case, the primary link is reconfigured as a secondary link. If the switchover is rejected, then the process returns to the initial state, Fig. 1c right-hand side.

Referring to Fig. 1d, the activation of the PSTN protocol in a V5.2 interface in a preferred embodiment of the procedure of the invention will now be described in detail. After a confirmation of successful activation of the other protocols essential to the interface has been received, the activation of the PSTN protocol is performed last. At the beginning of the activation procedure, a check is carried out to establish whether a PSTN protocol has been configured for the interface. If the configuring has been done, then activation is continued by checking whether the PSTN data link is operational. If the link is not operational, then a link switchover request is transmitted and the process goes into a "start-up switchover 2" state. If the link is operational, then a link setup request is transmitted and the process remains waiting for a confirmation.

Fig. 1e shows the following stages when the process is waiting for a switchover of the PSTN link.

If the switchover is successfully completed, then after this a PSTN data link setup request is transmitted over the new link and the process remains waiting for a confirmation. If the switchover is unsuccessful, then the process returns to the initial state and the interface activation procedure is terminated. Fig. 1f illustrates various situations that may arise while the process is waiting for the activation of the PSTN data link. First, if a message indicating successful activation of the link is received, then the process continues normally and a message is sent to indicate that the interface has been correctly activated. On the other hand, if a message indicating that the PSTN data link has been released, then a new request for the activation of the data link is transmitted. Let it be stated that, according to the invention, a corresponding activation request can be transmitted for all the essential protocols, such as the Protection or BCC protocols, during all stages of the interface start-up process. Further, referring to Fig. 1g, the operations carried out in the above-mentioned reactivation situation are described. When a message indicating the release of a data link is received, a check is carried out to determine whether there is a protection data link available for the data link concerned. If no link is available, then a message indicating that start-up was not properly carried out is transmitted and the process returns to the initial state. If a protection data link exists, then a data link activation request is transmitted over the protection data link. On the other hand, if an error message indicating that there is an error in the data link, which may be due to differences in configuration at the ends of the interface, then a message indicating that start-up was not properly carried out is transmitted and the process returns to the initial state.

The invention is not restricted to the examples of its embodiments described above, but many variations are possible within the scope of the inventive idea defined by the claims.

CLAIMS

1. Procedure for ensuring the activation of a V5 interface formed between a local exchange (LE) and an access node (AN) and comprising at least two links (L), in which interface the operational condition of the links reserved for protocols essential to the operation of the interface as well as the operational condition of the primary and secondary links reserved for protocols used to protect them is checked during the activation procedure, characterised in that

the checking of the operational condition of the primary and secondary links is started simultaneously both on the local exchange side and on the access node side;

the process waits for a confirmation that the primary and/or secondary links/link are/is operational; and if

a confirmation indicating that the link is operational is received for the secondary link first, then a switchover of the primary link to the secondary link according to the V5 definitions is performed and the new primary link is used for protection in the V5 interface during the V5 interface activation process.

2. Procedure as defined in claim 1, characterised in that if the primary link switchover is unsuccessful, then the V5 interface activation process is terminated.

3. Procedure as defined in claim 1 or 2, characterised in that if the primary link becomes operational during the V5 interface activation process, then the primary link is defined as a new secondary link.

4. Procedure as defined in any one of claims 1 - 3, characterised in that the C-channels of the V5 interface are protected during the activation

on process by the new primary link without returning to the initial state even if the link allocated for the PSTN protocol should be out of order.


5 5. Procedure as defined in any one of claims 1 - 4, characterised in that, when the process is waiting for a confirmation of activation of the PSTN protocol, switchover of the link allocated for the PSTN protocol is carried out if the link fails.

10 6. Procedure as defined in any one of claims 1 - 5, characterised in that if a standard "release link" command concerning the data link for the protection protocol is received, then the data link is immediately reactivated.

15 7. Procedure as defined in any one of claims 1 - 5, characterised in that if a standard "release link" command concerning the data link for any protocol in the V5 interface is received, then the data link is immediately reactivated.

20 8. Procedure as defined in any one of claims 1 - 7, characterised in that, before the activation of different protocols, such as the PSTN protocol, a check is carried out to establish whether the link allocated for the protocol in question is operational.

25

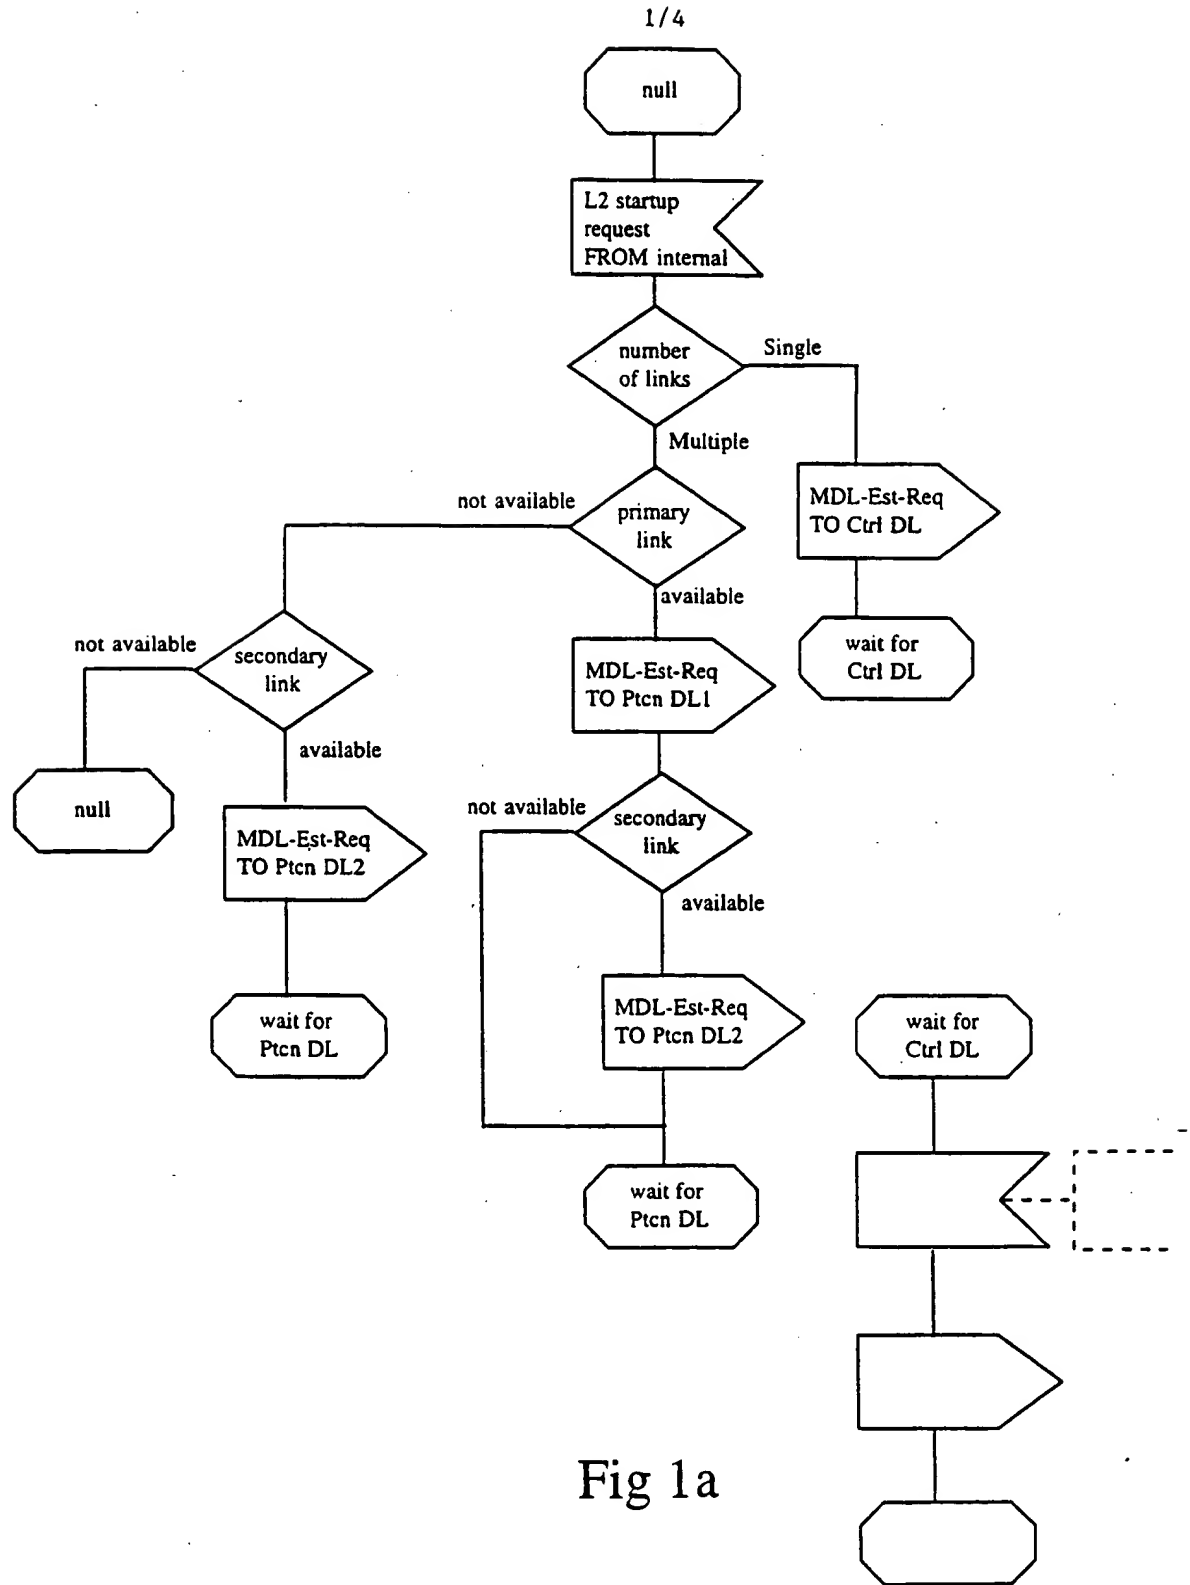

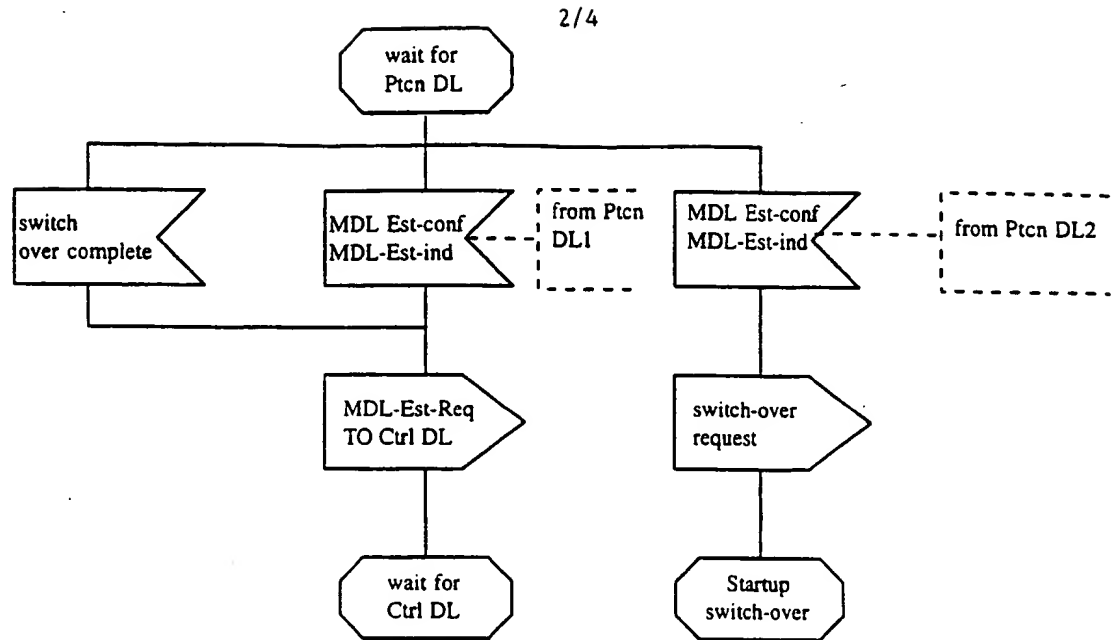


Fig 1b

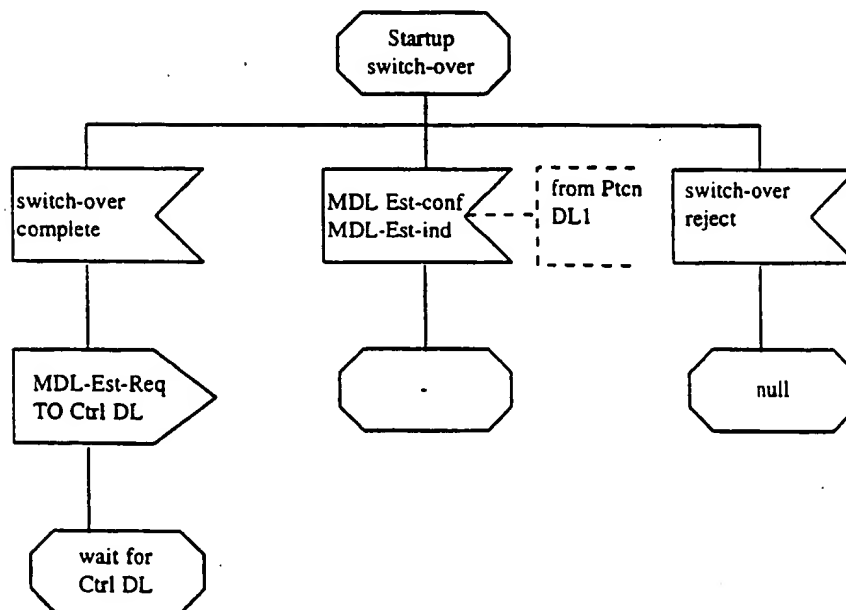


Fig 1c

3/4

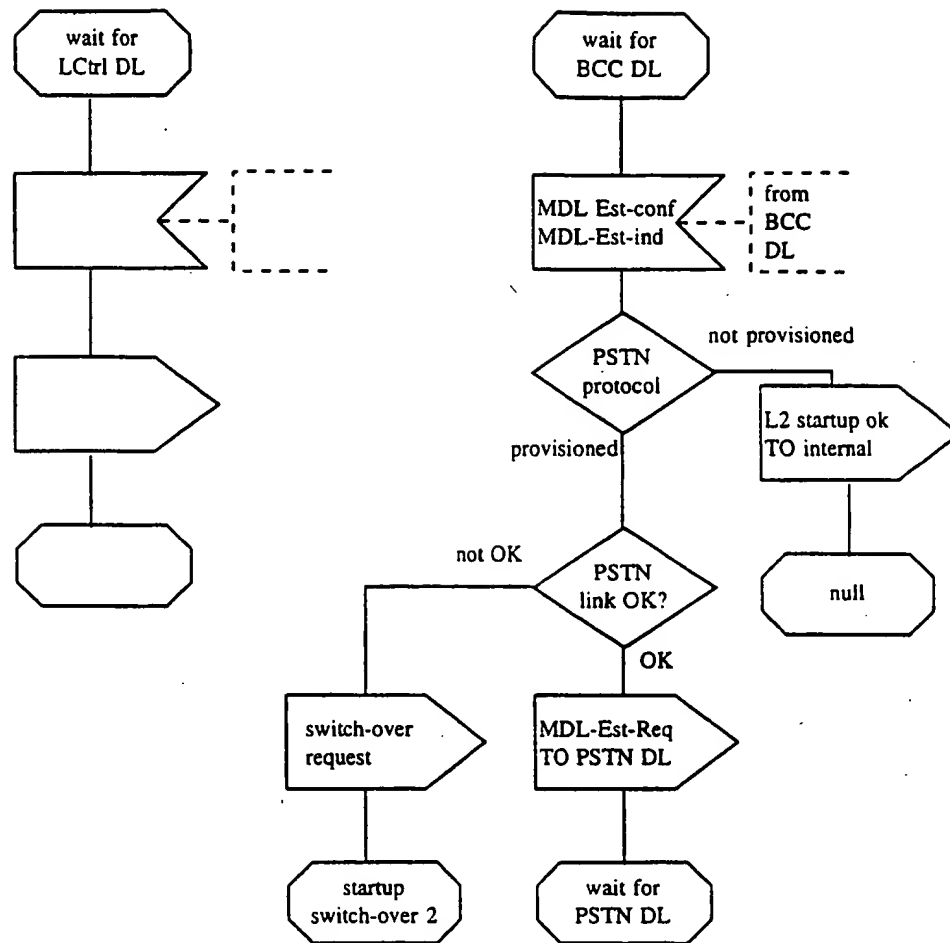


Fig 1d

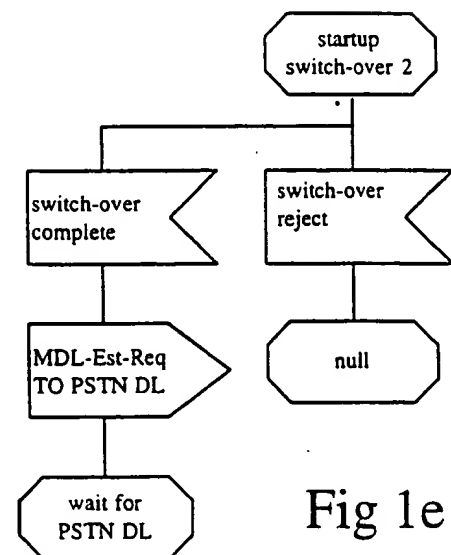


Fig 1e

4/4

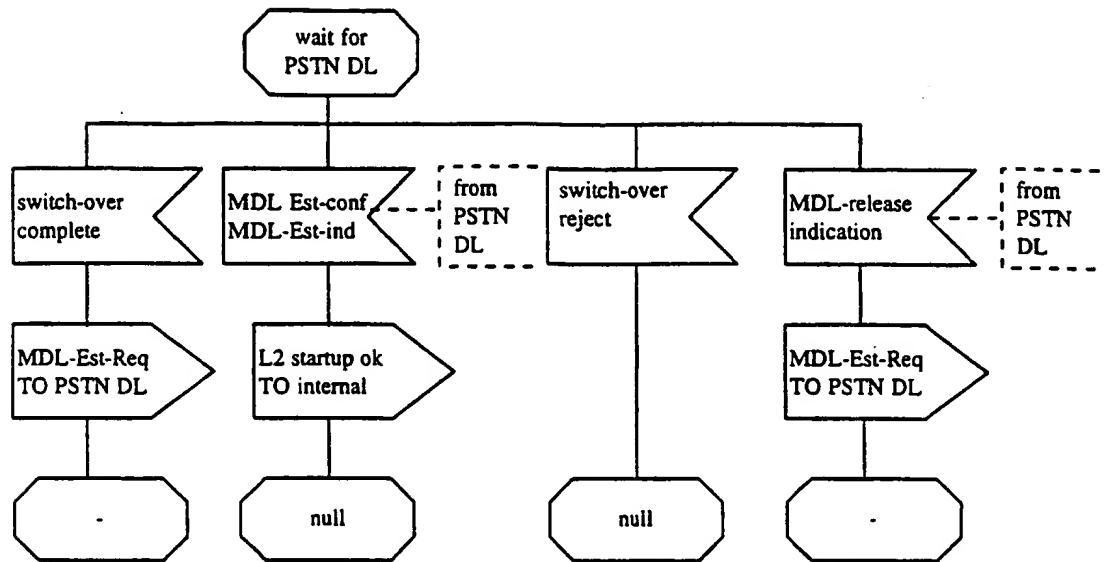


Fig 1f

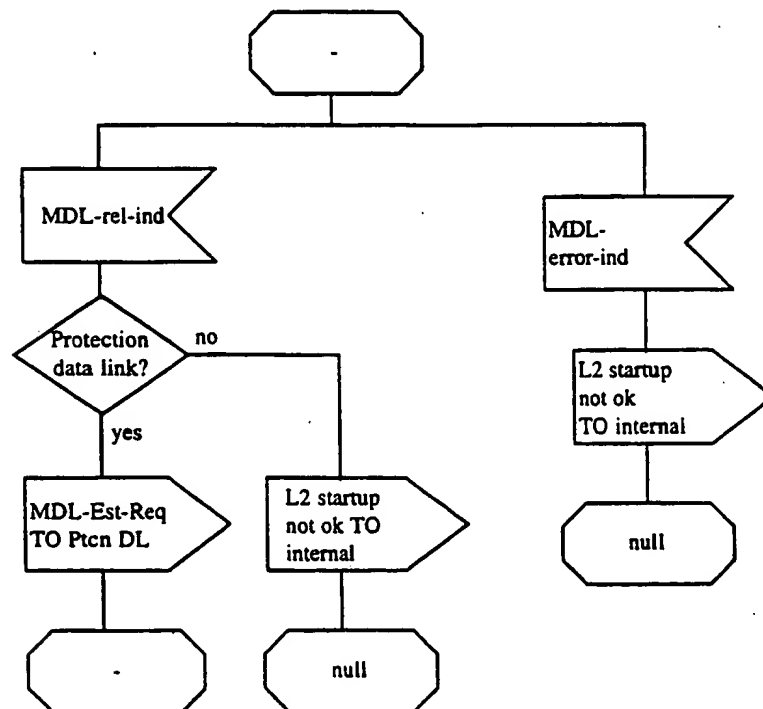


Fig 1g

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00115

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FREQUENZ, Volume 48, 1994, (Berlin), Karim Khakzar, "V5 Interfaces between Digital Local Exchanges and Access Networks" page 44 - page 50 --	1-8
A	IEEE Global Telecommunication Conference, Volume 3, December 1992, (USA), Dr. Alex Gillespie, "INTERFACING ACCESS NETWORKS TO EXCHANGES:- THE ETSI V5 APPROACH" page 1754 - page 1758 --	1-8
P,A	EP 0763953 A2 (SIEMENS AKTIENGESELLSCHAFT), 19 March 1997 (19.03.97), column 1, line 1 - column 6, line 12 -----	1-8

☐

Further documents are listed in the continuation of Box C.

☒

See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

25 August 1998

Date of mailing of the international search report

26-08-1998

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Cecilia Sandell

Telephone No. +46 8 782 25 00

Form PCT ISA/210 (second sheet) (July 1992)

Information on patent family members

International application No.

27/07/98

PCT/FI 98/00115

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0763953 A2	19/03/97	DE 19533961 A US 5751574 A	20/03/97 12/05/98
<hr/>			

Form PCT/ISA/210 (patent family annex) (July 1992)